

MINI MACHINE SCREW ANCHOR DRIVE

Our screw anchor torque heads for mini loaders and mini machines up to 3.5 tonnes are a deal for confined or low access sites. Over 40 years of design and development has produced the highest quality range of drives on the market today built.




Features

- Compact high torque Digga manufactured gearbox
- Lightweight, just 90lbs for ease of movement in confined spaces
- Fitted with a high efficiency Danfoss/Digga geroler hydraulic motor
- Motor mounted pressure relief valve
- Over double side-load capacity to comparable gearboxes
- 1yr gearbox and 1yr warranty



Specifications	MM-10K
Max Torque	14,206 NM @ 205 BAR
Maximum Pressure	205 BAR @ 70 LPM
Maximum Flow	70 LPM @ 205 BAR
Max Power	33 KW
Pressure Relief Valve Fitted	N/A
Standard Output Shaft	63.5mm Hex
Weight (no frame or hitch)	63 KG
Overall Length	612 MM
Diameter	290 MM

Output Torque		Output Speed	
BAR	NM	LPM	RPM
50	3,431	30	7
60	4,118	35	8
70	4,804	40	9
80	5,490	45	10
90	6,176	50	12
100	6,863	55	13
110	7,549	60	14
120	8,235	65	15
130	8,922	70	16
140	9,608		
150	10,294		
160	10,980		
170	11,667		
180	12,353		
190	13,039		
205	14,206		

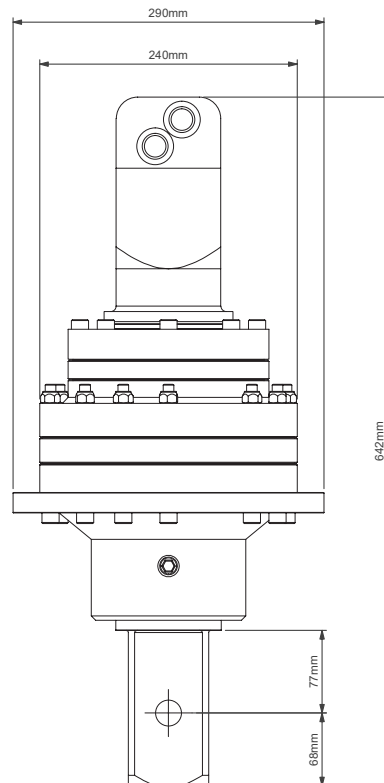

Output speed and torque specifications are THEORETICAL. Speed and torque output are dependent on the overall system efficiencies associated with the prime movers hydraulic system. This document should be used for information and comparative purposes only. When determining criteria, & application specific information is required, please contact DIGGA.