

PTO - SHAFT DRIVEN 3 POINT AUGER DRIVE



Extendable boom model

The original PTO driven, down pressure drill with heavy duty clutch and frame. Easy to install and store.

Features



- High Quality Materials and Manufacturing
- PTO shaft cover for maximum safety
- Heavy duty fully adjustable frame
- Hydraulic up and down for maximum downforce
- Adjustable stabilizer legs for ease of storing and fitment
- Only requires one set of remotes
- Heavy Duty Clutch
- 50hp and 75hp Models available

Ideal Uses

Post Hole Boring, fencing and tree planting

Machine Suitability

Tractors with 3 point linkage, or 3 point linkage adapter with a minimum of 2 double acting Auxiliary ports.

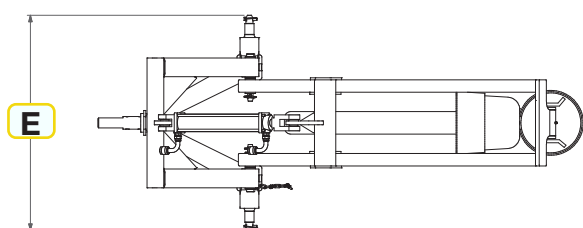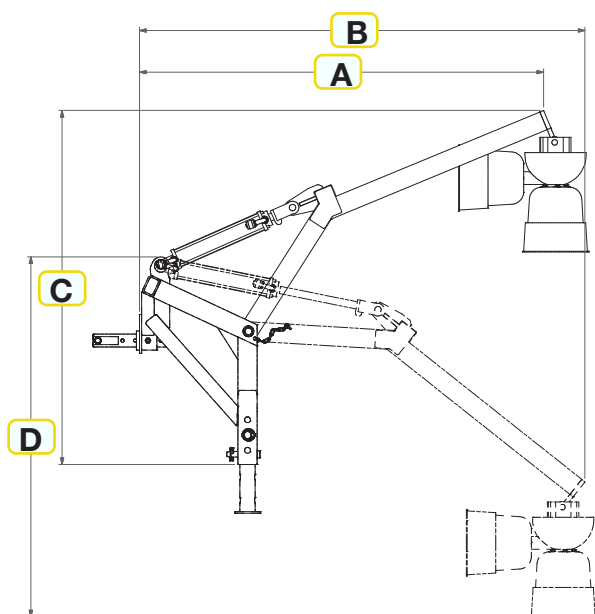

Specifications	PTO Gearbox (fixed boom)
Length (A)	1640
Length (B)	1759
Height (C)	1395-1755
Height (D)	1411
Width (E)	862
Weight (kgs)	217 (50hp) / 250 (75hp)
Max Digging Depth	1708



Fixed boom model